
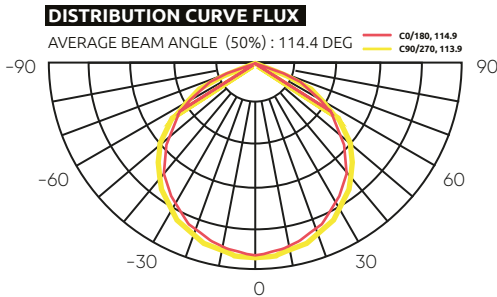


ZEUS 600W PRO 2.9

The higher specification Lumatek Zeus Pro 2.9 is a linear multi-light bar fixture producing very high levels of PPF of 1770 $\mu\text{mol/s}$ and a Photon Efficacy of up to 2.9 $\mu\text{mol/J}$.

- Interchangeable 100 W Pro 2.9 Magnet light bars with clear glue cover
- Detachable driver for remote use

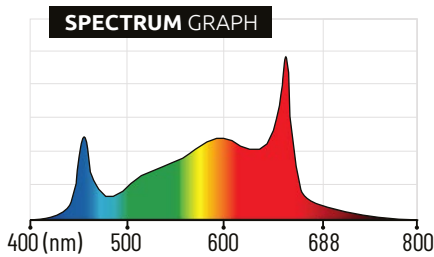

HEIGHT TO TEST POINT 40cm
CANOPY AVERAGE PPF/D 662.2 $\mu\text{mol/s/m}^2$

339,6	363	460,9	482,2	474,6	479	463	379,5	351,8	369,7
433,9	451,3	532,6	603,4	572,2	616,5	574,7	520,9	445,9	450,4
483,7	562,9	732,4	830,8	850,6	825,4	805,3	753	603	473,7
519,2	691,1	842,9	919,1	938,4	941,3	905,5	820,4	658,3	494,8
561,6	715,8	891,3	956,8	1004	997,7	969,8	862,7	691,5	560,2
518,6	770,3	909,7	979,4	1010	1009	950,5	856,2	678,9	556,5
534,8	750	878	966,9	990,6	981,9	936,3	874,8	723,1	587,1
534,6	621,3	788,9	828	877,8	859,7	829,2	777,7	626,2	592
392	484,9	585,9	623,5	643,6	669,2	667,5	574	534	513,4
322,2	397,4	454,4	511,1	544,3	570,9	496,6	478,5	393	341,3

- Walls Reflection 0%
- Fixture Power 100%

PRODUCT CODE LUMLED010

LIGHT DISTRIBUTION 120° (Beam Angle)

LIGHT SOURCE Higher Spec Osram & Lumileds Diodes

INPUT VOLTAGE 220-240 V AC, 50-60 Hz

INPUT POWER 615 W (2.9 A @230 V AC)

EFFICACY 2.9 $\mu\text{mol/J}$

PPF 1770 $\mu\text{mol/s}$

FOOTPRINT 1.4 x 1.4 m

POWER FACTOR > 0.95

DIMMING OFF-25-50-75-100% with 0-10V Light Dimmer (incl.)

EXTERNAL CONTROL With Lumatek or any Universal Controllers 0-10 V

DAISY CHAIN CAPABILITY Yes

WEIGHT 13.5 Kg

DIMENSIONS 1091 x 1182 x 52 mm

SPECTRUM Full Spectrum F

THERMAL MANAGEMENT Passive

LIFETIME L90 > 60000 hrs

WARRANTY 5 Years

IP RATING IP65

CERTIFICATIONS CE, EMC, LVD



GROW OPTIMAL
BY REQUESTING
A LIGHT PLAN & REPORT

