


Top filling ultrasonic humidifiers Automatic filling ultrasonic humidifiers

Instruction Book

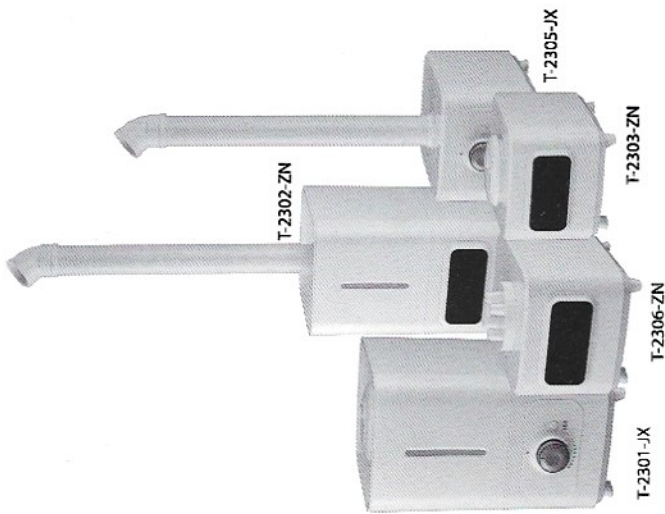

Applicable model: T-2301-JX, T-2301-ZN, T-2302-JX, T-2302-ZN, T-2303-JX, T-2303-ZN, T-2305-JX, T-2305-ZN, T-2306-JX, T-2306-ZN
Please read the instruction manual carefully before use

Mechanical function description

1. Turn the potentiometer clockwise when plug in, the indicator is on green and the fan is turned on. The fog level can be adjusted by rotating the potentiometer.
2. Water shortage protection: water shortage or transducer open circuit, the machine stops to work, the fan off and the indicator is on red.
3. Night light on key: Press this button to turn on the night light while the product is in operation, and press it again to turn off the night light. The night light is turned off by default when turned on.

Intelligence Function description

1. Power on key: turn on and off the humidifier. Default third gear fog operation. Touch again to enter standby mode.
2. Constant humidity key: under the working state, touch the key to enter the constant humidity function; the constant humidity label is on, The default humidity is 40%, increase by 5% until 90%, and then press again to display "--", 5 seconds Exit the constant humidity function without operation, and adjust in this cycle.
3. Fog volume key: it can be divided into fourth levels, The fog amount can be adjusted, Touch the key every time to adjust the cycle, and the corresponding gear circle mark will be displayed on the display screen.
4. Sterilization Button: Tap this button to turn on or off the UV "Sterilization" function while the product is in operation; it is initially off by default when the product is powered on. When the sterilization function is activated and the humidification function is turned on, the UV should automatically turn off after the product reaches the set humidity level and stops spraying mist, and it should automatically turn back on when misting resumes.
5. Timing key: touch the key to start the scheduled timing shutdown function. Each time you touch the key, the display screen will display the corresponding, the timing circle mark is on, and the remaining shutdown time is displayed in the working process.
6. Night Light Button: Tap this button to turn on the night light when the product is in operation, tap again to turn off the night light. The night light is initially off by default when the product is powered on.

Instructions top filling


1. Place the humidifier on a stable surface, open the water tank cover, and then pour purified water or clean tap water into the tank, ensuring that the water temperature does not exceed 40 degrees Celsius.
2. Cover the water tank.
3. Connect to an AC 220V/50Hz power source, turn on the power switch on the unit to start the humidifier.
4. Adjust the mist volume according to your needs.
5. When the water tank is empty, the built-in safety device will automatically disconnect the atomization circuit. At this time, no mist will spray from the mist outlet, and the red indicator light will illuminate.
6. If you wish to continue use, please cut off the power supply and refill the water tank.

Instructions automatic filling

1. Place the humidifier on a stable surface, open the water tank cover, and then pour purified water or clean tap water into the tank, ensuring that the water temperature does not exceed 40 degrees Celsius.
2. Cover the water tank.
3. Connect to an AC 220V/50Hz power source, turn on the power switch on the unit to start the humidifier.
4. Adjust the mist volume according to your needs.
5. When the water tank is empty, the built-in safety device will automatically disconnect the atomization circuit. At this time, no mist will spray from the mist outlet, and the red indicator light will illuminate.
6. If you wish to continue use, please cut off the power supply and refill the water tank.

Top filling ultrasonic humidifiers Automatic filling ultrasonic humidifiers

Instruction Book

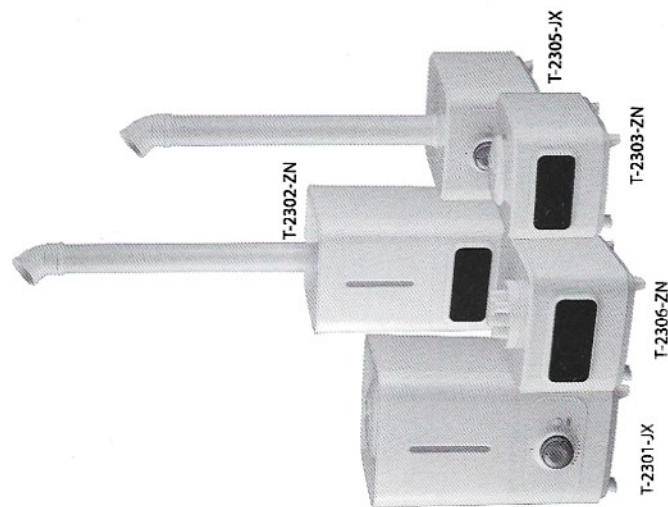

Applicable model: T-2301-JX, T-2301-ZN, T-2302-JX, T-2302-ZN, T-2303-JX, T-2303-ZN, T-2305-JX, T-2305-ZN, T-2306-JX, T-2306-ZN
Please read the instruction manual carefully before use

Mechanical function description

1. Turn the potentiometer clockwise when plug in, the indicator is on green and the fan is turned on. The fog level can be adjusted by rotating the potentiometer.
2. Water shortage protection: water shortage or transducer open circuit, the machine stops to work, the fan off and the indicator is on red.
3. Night light on key: Press this button to turn on the night light while the product is in operation, and press it again to turn off the night light. The night light is turned off by default when turned on.

Intelligence Function description

1. Power on key: turn on and off the humidifier. Default third gear fog operation. Touch again to enter standby mode.
2. Constant humidity key: under the working state, touch the key to enter the constant humidity function; the constant humidity label is on, The default humidity is 40%, increase by 5% until 90%, and then press again to display "...", 5 seconds. Exit the constant humidity function without operation, and adjust in this cycle.
3. Fog volume key: it can be divided into fourth levels. The fog amount can be adjusted. Touch the key every time to adjust the cycle, and the corresponding gear circle mark will be displayed on the display screen.
4. Sterilization Button: Tap this button to turn on or off the UV "Sterilization" function while the product is in operation; it is initially off by default when the product is powered on. When the sterilization function is activated and the humidification function is turned on, the UV should automatically turn off after the product reaches the set humidity level and stops spraying mist, and it should automatically turn back on when misting resumes.
5. Timing key: touch the key to start the scheduled timing shutdown function. Each time you touch the key, the display screen will display the corresponding, the timing circle mark is on, and the remaining shutdown time is displayed in the working process.
6. Night Light Button: Tap this button to turn on the night light when the product is in operation; tap again to turn off the night light. The night light is initially off by default when the product is powered on.

Instructions top filling

1. Place the humidifier on a stable surface, open the water tank cover, and then pour purified water or clean tap water into the tank, ensuring that the water temperature does not exceed 40 degrees Celsius.
2. Cover the water tank.
3. Connect to an AC 220V/50Hz power source, turn on the power switch on the unit to start the humidifier.
4. Adjust the mist volume according to your needs.
5. When the water tank is empty, the built-in safety device will automatically disconnect the atomization circuit. At this time, no mist will spray from the mist outlet, and the red indicator light will illuminate.
6. If you wish to continue use, please cut off the power supply and refill the water tank.

Instructions automatic filling

1. Place the humidifier on a stable surface, open the water tank cover, and then pour purified water or clean tap water into the tank, ensuring that the water temperature does not exceed 40 degrees Celsius.
2. Cover the water tank.
3. Connect to an AC 220V/50Hz power source, turn on the power switch on the unit to start the humidifier.
4. Adjust the mist volume according to your needs.
5. When the water tank is empty, the built-in safety device will automatically disconnect the atomization circuit. At this time, no mist will spray from the mist outlet, and the red indicator light will illuminate.
6. If you wish to continue use, please cut off the power supply and refill the water tank.

Safety precautions

- When tilting the unit, please disconnect the power supply before handling it.
- Do not touch the atomizing piece with your hands when the machine is turned on, as it may cause pain.
- Do not disassemble the unit arbitrarily to avoid electric shock accidents.
- The power cord must not be scratched, damaged, excessively bent, pulled, twisted, knotted, pressed with heavy objects, clamped, processed, as it may cause electric shock, short circuit, or fire.
- Do not allow children to operate the machine.
- If the power cord is damaged, it must be replaced by a professional from the manufacturer's repair department or a similar department to avoid danger.

Operation precautions

- When using the product, the following safety measures must be observed:
- Read all instructions carefully, even if you are familiar with this product.
 - Before connecting the appliance to the power supply, please check whether the voltage used in your home is in phase with the voltage marked on the heater if the voltage does not match, please contact the dealer and do not use it.
 - Do not use the machine near hot surfaces
 - Do not put the humidifier in the vent and keep away from electrical products as far as possible
 - Do not let water flow into the body from the air outlet: if there is water outside the body, please clean it with dry cloth.
 - When the room temperature is lower than 0 C, please pour out the water in the water tank and water tank, so as to avoid damage to the machine caused by water freezing.

- Please do not put metal products, chemicals, detergents, etc. into the water tank, or there will be bad atomization
- When the machine is working, please do not move at will, otherwise electric shock will occur
- When it is not used for a long time, please cut off the power supply and pull off the plug. (the appliance does not need to be grounded)
- Turn off the power when pouring the remaining water in the water trough, otherwise the transducer will be burnt out.
- When adding water, do not turn the body upside down.

Common Troubleshooting Method

Abnormal symptom	Cause	Handling
Indicator not illuminated, no air, no fog	The power plug is not properly plugged The power switch is not turned on There is no water in the water tank	Plug the power plug properly Turn on the power switch Top up the water tank
Indicator illuminated, with air, no fog	The automatic constant humidity knob is not turned on The water level float cap is not held down	Turn the automatic constant humidity knob clockwise Hold down the water level float cap
Spray with odor	New unit The water in the tank is not clean	Open the water tank Place at a shade for 12 hours Clean or replace the water tank
Indicator illuminated, no air, no fog	The water level in the water bath is too high	Pour out some water in the water bath Screw down the water tank cover
Small fog output	There is scale formation on the transducer The water is dirty or has been stored too long	Clean the transducer Replace with clean water

Product feature

Power: 220V-240V
 Rated power: 0-50W
 Rated frequency: 50-60Hz
 Material: Plastic